

INTERCONNECT SYSTEM™ FIRST SOLAR SERIES 6

ABOUT



Shoals' patented Interconnect System™ reduces the specialized labor required in your installation, making the integration of solar panels a breeze. With harnesses custom manufactured for your specific site, both labor and material costs are significantly reduced. The simplified design and robust construction also increases reliability, making the Interconnect System™ a perfect solution for any project.

FEATURES

- UV/sunlight resistant
- Resistance welded joints
- Custom manufactured to the installation
- Standard 5-year warranty on all models
- Patented chemically bonded and hermetically sealed two part molding process
- TUV certified to IEC 62930 and 62852 up to 1500V DC

OPTIONS

- Available in 7, 6, 5, 4, and 3-string configurations
- 4mm², 6mm², and 10mm² wire size available
- Certified PV connectors available
- Cable available in standard colors
- Standard input fuse sizes 5A

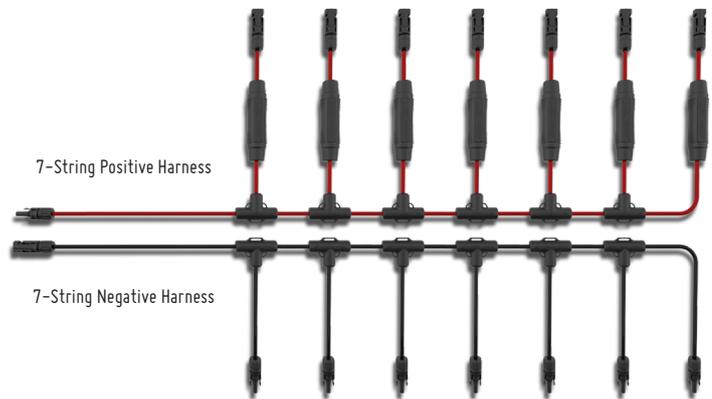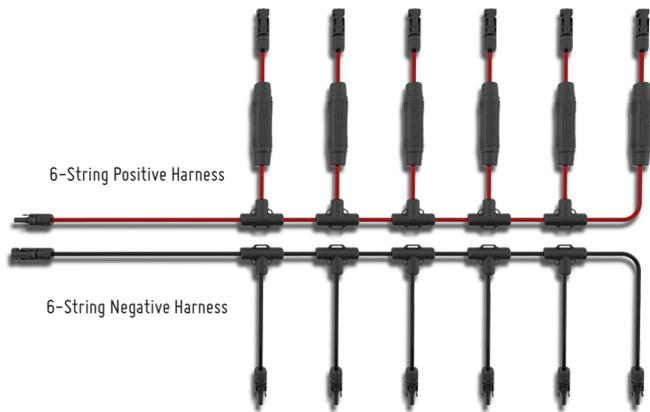

TECHNICAL INFORMATION

INTERCONNECT SYSTEM™

Voltage Rating	600 VDC / 1000 VDC / 1500 VDC
Max. DC Current	20A (4mm ²) / 45A (6mm ²) / 65A (10mm ²)
Max. Input Overcurrent Protection	5A*
Max. Operating Temp.	90°C
Wet Hi-Pot Leakage Current	< 1 μA

*Max Input Overcurrent Protection per First Solar's technical bulletin received 2/27/2020. consult your sales representative for more information.
Plastic over-mold material is suitable for outdoor use with respect to exposure to UV light, Water Exposure and Immersion in accordance with IEC 62930 Annex E.
Product design and specification subject to change or modification without notice.